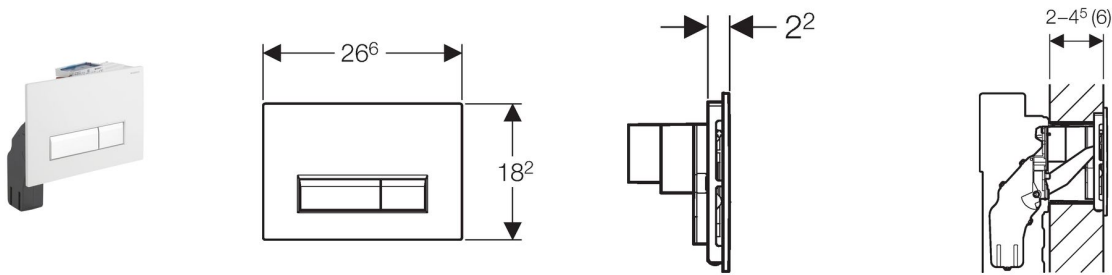


Geberit flush plate Sigma40 for dual flush with integrated odour extraction, plastic

NEW


Application purpose

- For dual flush
- For use with Geberit Sigma concealed cistern 12 cm (UP320) with connection for odour extraction unit with filtration 111.353.00.5
- For front actuation
- For direct odour extraction from the WC ceramic appliance
- For odour neutralisation through an active carbon filter
- For installation in walls with up to 6 cm covering thickness (with extension set)
- For adding in-cistern blocks without chlorine or oxidising components
- ❌ Not suitable for use with Geberit Kappa (UP200) concealed cistern 15 cm and Geberit Sigma concealed cistern 8 cm (UP720)

Characteristics

- Odour extraction unit with filtration integrated in the concealed cistern
- Ventilation and control unit with radial fan, can be installed without tools
- LED display for filter replacement
- Odour neutralisation with active carbon filter
- Push-button for switching the odour extraction unit on and off
- Automatic switching off of the odour extraction unit after a predefined running time
- Tool-free replacement of the active carbon filter
- Tool-free insertion of in-cistern blocks

Technical data

Actuation force	< 20	N
Product material	Plastic/aluminium-plastic composite	
Nominal voltage	230	V AC
Mains frequency	50	Hz
Operating voltage	12	V DC
Power consumption	3	W
Air volume flow rate odour extraction unit	8.5	m ³ /h
Protection degree	IP x4	
Protection class	III	

Scope of delivery

- Mounting frame with swivelling mechanism
- Distance rods
- Actuator rods
- Ventilation and control unit
- Power supply unit with LED display
- Cable connection with plug
- Active carbon filter type 1
- Cover
- Insert for in-cistern blocks
- Moisture protection on conduit pipe

Article

Article no.	Colour	PU1	PU2	PU4
115.600.KQ.1	white plastic	1	4	64
115.600.KR.1	black plastic	1	4	